


Product Technical Sheet

24 Aug 2023 04:26

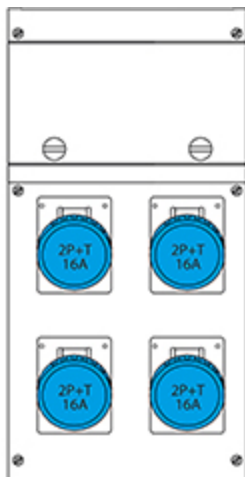

630.4506-1058 DISTRIBUTION ASSEMBLY (ACS)

4 NR IP66 212x415x105mm

Product Approvals

| TECHDATA | | STANDARDS AND LAWS | |
|-------------------------------|-----------------------------|----------------------------------|---|
| Protection degree | Splash proof | EN 61439-4 (2013-03) | [European Standard] Low-voltage switchgear and controlgear assemblies - Part 4: Particular requirements for assemblies for construction sites (ACS) |
| Mounting version | PORTABLE | | |
| Commercial series | BLOCK Series | DIRECTIVE LOW VOLTAGE 2014/35/UE | [European Directives] Low Voltage Directive |
| Product type | DISTRIBUTION ASSEMBLY (ACS) | DIRECTIVE EMC 2014/30/UE | [European Directives] Electromagnetic Compatibility Directive |
| Synthetical description | DISTRIBUTION ASSEMBLY (ACS) | | |
| Material | THERMOPLASTIC | | |
| Dimensions | 212x415x105mm | | |
| Protection degree IP | IP66 | | |
| Protection degree IK | IK08 | | |
| Inlet supply unit (*) | Plug | | |
| No. of available outlets | 4 NR | | |
| No. of sockets 2P+E 16A (*) | 4 NR | | |
| In disp. ing/tipo apparecchio | RCD 2P 25A 0,03A | | |
| In disp. ing/tipo apparecchio | MCB 1P+N 16A | | |
| Max power gen. | 3 KW | | |