


## Product Technical Sheet

24 Aug 2023 04:56

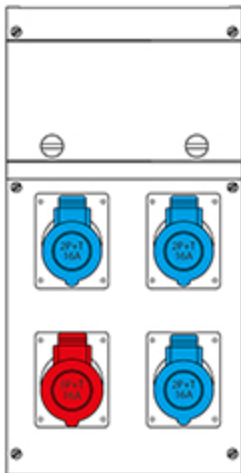

# 632.4006-008

## DISTRIBUTION ASSEMBLY

4 NR IP44 212x415x105mm

Product Approvals

| TECHDATA                      |                              | STANDARDS AND LAWS               |   |
|-------------------------------|------------------------------|----------------------------------|---|
| Protection degree             | Splash proof                 | EN 61439-3 (2012-04)             | [European Standard] Low-voltage switchgear and controlgear assemblies - Part 3: Distribution boards intended to be operated by ordinary persons (DBO) |
| Mounting version              | SURFACE MOUNTING             | DIRECTIVE LOW VOLTAGE 2014/35/UE | [European Directives] Low Voltage Directive   |
| Product type                  | DISTRIBUTION ASSEMBLY        | DIRECTIVE EMC 2014/30/UE         | [European Directives] Electromagnetic Compatibility Directive   |
| Commercial series             | BLOCK Series                 |                                  |   |
| Synthetical description       | DISTRIBUTION ASSEMBLY        |                                  |   |
| Material                      | THERMOPLASTIC                |                                  |   |
| Dimensions                    | 212x415x105mm                |                                  |   |
| Protection degree IP          | IP44                         |                                  |   |
| Protection degree IK          | IK08                         |                                  |   |
| Inlet supply unit (*)         | Direct supply to main switch |                                  |   |
| No. of available outlets      | 4 NR                         |                                  |   |
| No. of sockets 2P+E 16A (*)   | 3 NR                         |                                  |   |
| No. of sockets 3P+E 16A (*)   | 1 NR                         |                                  |   |
| In disp. ing/tipo apparecchio | MCB 4P 16A                   |                                  |   |
| In disp. ing/tipo apparecchio | RCD 4P 25A 0,03A             |                                  |   |
| Max power gen.                | 9 KW                         |                                  |   |