

Product Technical Sheet

24 Aug 2023 08:07




656.5124-611

DISTRIBUTION ASSEMBLY (ACS)

4 NR IP66 440x365x290mm

Product Approvals

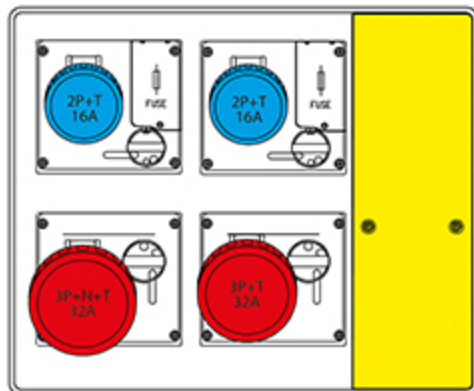

| TECHDATA | | STANDARDS AND LAWS | |
|-------------------------------|-----------------------------|----------------------------------|---|
| Protection degree | Splash proof | EN 61439-4 (2013-03) | [European Standard] Low-voltage switchgear and controlgear assemblies - Part 4: Particular requirements for assemblies for construction sites (ACS) |
| Mounting version | PORTABLE | | |
| Commercial series | MBX2 | DIRECTIVE LOW VOLTAGE 2014/35/UE | [European Directives] Low Voltage Directive |
| Product type | DISTRIBUTION ASSEMBLY (ACS) | DIRECTIVE EMC 2014/30/UE | [European Directives] Electromagnetic Compatibility Directive |
| Synthetical description | DISTRIBUTION ASSEMBLY (ACS) | | |
| Material | THERMOPLASTIC | | |
| Dimensions | 440x365x290mm | | |
| Protection degree IP | IP66 | | |
| Protection degree IK | IK08 | | |
| Inlet supply unit (*) | Plug | | |
| No. of available outlets | 4 NR | | |
| No. of sockets 2P+E 16A (*) | 2 NR | | |
| No. of sockets 3P+E 32A (*) | 1 NR | | |
| No. of sockets 3P+N+E 32A (*) | 1 NR | | |
| In disp. ing/tipo apparecchio | MCB 4P 32A | | |
| In disp. ing/tipo apparecchio | RCD 4P 40A 0,03A | | |
| Max power gen. | 18 KW | | |