


ITEM	DESCRIPTION	CHARACTERISTICS	COLOR
1	CONNECTOR	TYPE 2 - 20A AC THREE-PHASE	GREY SIMILAR TO RAL 7004
2	CABLE	5G2,5+1x0,5 EN50620-2017	BLACK
3	L1	2,5 mm ²	BROWN
4	L2	2,5 mm ²	BLACK
5	L3	2,5 mm ²	GREY
6	N	2,5 mm ²	BLUE
7	PE	2,5 mm ²	G/Y
8	CP	0,5 mm ²	NON BINDING

PART NUMBER	A (mm)	B (mm)		C (mm)		D (mm)	TERMINAL
		L1	L2	L3	N		
201.CS0022-5	5000 (0; +100)	L1	85 ± 10	L1	14 ± 1	5210 (0; +100)	NA
		L2	85 ± 10	L2	14 ± 1		NA
		L3	85 ± 10	L3	14 ± 1		NA
		N	85 ± 10	N	14 ± 1		NA
		PE	85 ± 10	PE	14 ± 1		NA
		CP	85 ± 10	CP	14 ± 1		NA
201.CS0022-8	7500 (0; +100)	L1	85 ± 10	L1	14 ± 1	7710 (0; +100)	NA
		L2	85 ± 10	L2	14 ± 1		NA
		L3	85 ± 10	L3	14 ± 1		NA
		N	85 ± 10	N	14 ± 1		NA
		PE	85 ± 10	PE	14 ± 1		NA
		CP	85 ± 10	CP	14 ± 1		NA

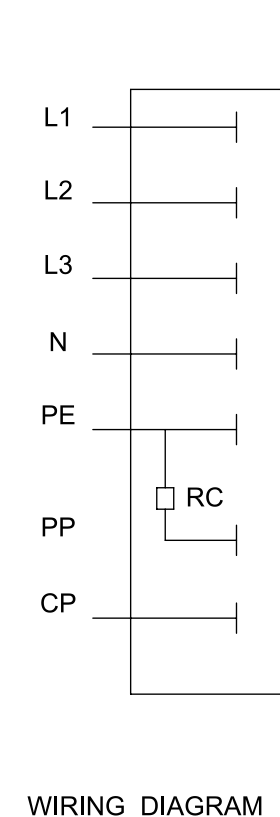

WIRING DIAGRAM

Under the terms of the law we reserve the ownership of this design may not be copied and transfer it to third parties or competitors SCAME S.p.A. PARRE - (Bergamo)	Format	A2	Scale	1:1	Mould N°	Drawn	SCAME
	Tolerances for linear and angular dimensions without indication of specific tolerances: JS13 / UNI 286-1:2010					Date	
	DESCRIPTION					Approved	
20A 3PH TYPE 2 OPEN END CHARGING CABLE						CODE	Sheet 1 / 1
						4010601	