


ITEM	DESCRIPTION	CHARACTERISTICS	COLOR
1	CONNECTOR	TYPE 2 - 32A AC THREE-PHASE	
2	CABLE	5G6+1x0,5 EN50620-2017 SPIRAL	BLACK
3	L1	6 mm <sup>2</sup>	BROWN
4	L2	6 mm <sup>2</sup>	BLACK
5	L3	6 mm <sup>2</sup>	GREY
6	N	6 mm <sup>2</sup>	BLUE
7	PE	6 mm <sup>2</sup>	G/Y
8	CP	0,5 mm <sup>2</sup>	NON BINDING

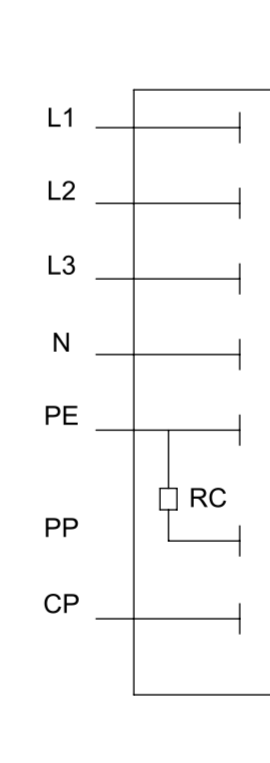

WIRING DIAGRAM

PART NUMBER	A (mm) working length	B (mm) linear length	C (mm)		D (mm)		E (mm) linear	TERMINAL
201.CS0024-4S	4000 (0 ; +100)	7000 ± 10	L1	85 ± 10	L1	14 ± 1	7210 ± 10	NA
			L2	85 ± 10	L2	14 ± 1		NA
			L3	85 ± 10	L3	14 ± 1		NA
			N	85 ± 10	N	14 ± 1		NA
			PE	85 ± 10	PE	14 ± 1		NA
			CP	85 ± 10	CP	14 ± 1		NA

<p>Under the terms of the law we reserve the ownership of this design may not be copied and transfer it to third parties or competitors</p> <p>SCAME S.p.A. PARRE - (Bergamo)</p>	Format	A2	Scale	1:1	Mould N°		Drawn	SCAME	
	Tolerances for linear and angular dimensions without indication of specific tolerances: JS13 / UNI 286-1:2010							Date	
	DESCRIPTION							Approved	
32A 3PH TYPE 2 OPEN END SPIRAL CHARGING CABLE						CODE	Sheet 1 / 1		
							4013652		