

## 204.CA11E-T2


Pillar in painted galvanized steel with  
1 socket Type 2 32A 230Vac 7,4kW with plug/lid lock



### > FUNCTIONS

charge in mode 3 with pwm circuit pilot  
identification of connected cord-set size  
protection against direct contact Safety Child Shutters  
current consumption metering  
managing of lid locking and latching system  
charge managing in case of power outage  
working in mode stand-alone free  
predisposition for serial communication

### > DIMENSION

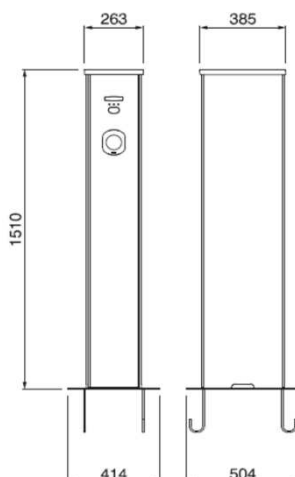

### > REFERENCE STANDARD

#### IEC/EN 61851-1

Electric vehicle conductive charging system.  
Part 1: General requirement.

#### IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.  
Part 7: Assemblies for e.v. charging stations.

### > TECHNICAL CHARACTERISTICS

Rated current:	<b>32A</b>
Rated voltage:	<b>230Vac</b>
Frequency:	<b>50-60Hz</b>
Insulating voltage:	<b>250V</b>
Protection degree:	<b>IP54</b>
Operating temperature:	<b>-30°C +50°C</b>
Material:	<b>Galvanized steel</b>
Glow wire test:	-
IK degree at 20°C:	<b>IK10</b>
Color:	<b>Grey</b>
Mounting:	<b>Base</b>
Salt mist:	<b>Resistant</b>
UV radiation:	<b>Resistant</b>

### > EQUIPMENTS

1 base with separation chamber  
1 lighting head in translucent and RGB led  
1 couple of front panels in polycarbonate  
1 terminal strip 3x35mm<sup>2</sup>  
1 current transformer  
1 modular contactor 2P 40A 24Vdc  
1 DC Leakage detector  
1 fuse holder 1P+N gG 4A  
1 power supply 24Vdc 36W  
1 control card  
1 backup battery  
1 lcd display 2x20 rows backlight  
1 stop charge push-button (mode free)

#### excluded:

upstream protections (by the installer):  
1 circuit breaker 1P+N C40 30mA ist. A