

## 204.CA16C-T2


Pillar in painted galvanized steel with  
1 socket Type 2 16A 400Vac 11kW with plug/lid lock



### > FUNCTIONS

- charge in mode 3 with pwm circuit pilot
- identification of connected cord-set size
- protection against overcurrents and electric shock
- protection against direct contact Safety Child Shutters
- current consumption metering
- identification of authorized user
- managing of lid locking and latching system
- charge managing in case of power outage
- working in mode stand-alone free or personal
- predisposition for serial communication

### > DIMENSION

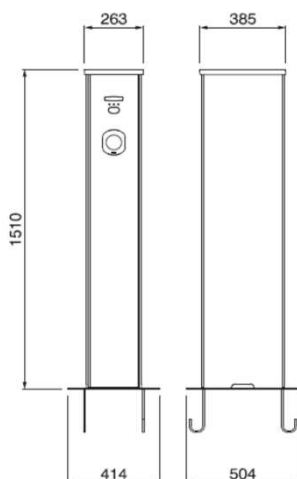

### > REFERENCE STANDARD

#### IEC/EN 61851-1

Electric vehicle conductive charging system.  
Part 1: General requirement.

#### IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.  
Part 7: Assemblies for e.v. charging stations.

### > TECHNICAL CHARACTERISTICS

Rated current:	<b>16A</b>
Rated voltage:	<b>400Vac</b>
Frequency:	<b>50-60Hz</b>
Insulating voltage:	<b>500V</b>
Protection degree:	<b>IP54</b>
Operating temperature:	<b>-30°C +50°C</b>
Material:	<b>Galvanized steel</b>
Glow wire test:	-
IK degree at 20°C:	<b>IK10</b>
Color:	<b>Grey</b>
Mounting:	<b>Base</b>
Salt mist:	<b>Resistant</b>
UV radiation:	<b>Resistant</b>

### > EQUIPMENTS

- 1 base with separation chamber
- 1 lighting head in translucent and RGB led
- 1 couple of front panels in polycarbonate
- 1 terminal strip 5x35mm<sup>2</sup>
- 1 circuit breaker 3P+N C20 30mA ist. A
- 1 current transformer
- 1 modular contactor 4P 25A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 backup battery
- 1 lcd display 2x20 rows backlight
- 1 reader RFID 13,56MHz
- 1 stop charge push-button (mode free)