

205.EVW13-B0


Wall mounting box in halogen free plastic with
1 socket Type 2 32A 230Vac 7,4kW with plug lock



> FUNCTIONS

charge in mode 3 with pwm circuit pilot
identification of connected cord-set size
protection against overcurrents and electric shock
protection against direct contact Safety Child Shutters
energy metering and current consumption
managing of latching system
power contactor aperture monitoring
working in mode stand-alone free

> DIMENSION

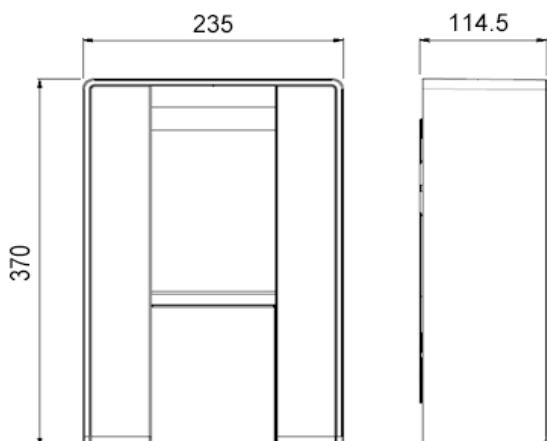

> REFERENCE STANDARD

IEC/EN 61851-1

Electric vehicle conductive charging system.
Part 1: General requirement.

IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.
Part 7: Assemblies for e.v. charging stations.

> TECHNICAL CHARACTERISTICS

Rated current:	32A
Rated voltage:	230Vac
Frequency:	50-60Hz
Insulating voltage:	250V
Protection degree:	IP54
Operating temperature:	-25°C +40°C
Material:	Engineering plastic
Glow wire test:	650°C
IK degree at 20°C:	IK08
Color:	Anthracite
Mounting:	Wall mounting
Salt mist:	Resistant
UV radiation:	Resistant

> CERTIFICATIONS

EV READY 1.4 COMPLIANT

> EQUIPMENTS

1 terminal strip 3x10mm2
1 circuit breaker 1P+N C40 30mA ist. A
1 shunt trip release 24Vdc
1 digital energy meter 1P+N 45A
1 industrial contactor 2P 32A 24Vdc
1 fuse holder 1P+N gG 4A
1 power supply 24Vdc 36W
1 control card
1 couple of service led
1 stop charge push-button (mode free)

excluded:

upstream protections (by the installer):
1 circuit breaker RCD Type B
emergency line 24Vdc (optional)