

## 205.W17-R0


Wall mounting box in halogen free plastic with  
1 connector Type 2 16A 230Vac 3,7kW with cable



### > FUNCTIONS

charge in mode 3 with pwm circuit pilot  
current consumption metering  
power contactor aperture monitoring  
working in mode stand-alone free  
predisposition for serial communication

### > DIMENSION

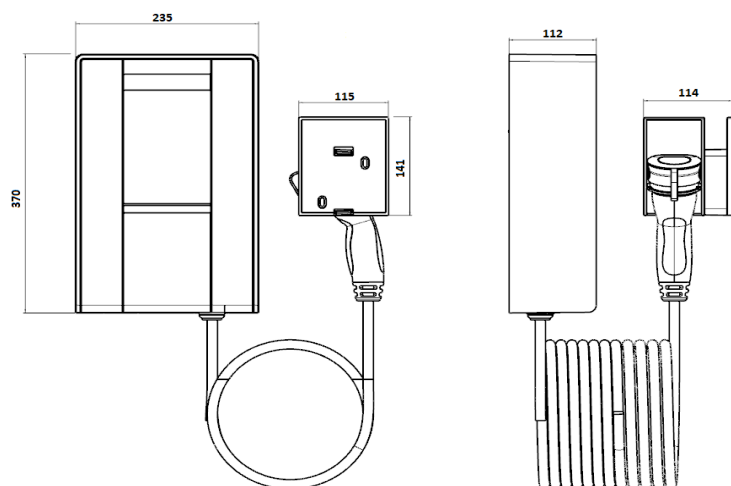

### > REFERENCE STANDARD

#### IEC/EN 61851-1

Electric vehicle conductive charging system.  
Part 1: General requirement.

#### IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.  
Part 7: Assemblies for e.v. charging stations.

### > TECHNICAL CHARACTERISTICS

Rated current:	<b>16A</b>
Rated voltage:	<b>230Vac</b>
Frequency:	<b>50-60Hz</b>
Insulating voltage:	<b>250V</b>
Protection degree:	<b>IP54</b>
Operating temperature:	<b>-30°C +50°C</b>
Material:	<b>Engineering plastic</b>
Glow wire test:	<b>650°C</b>
IK degree at 20°C:	<b>IK08</b>
Color:	<b>Anthracite</b>
Mounting:	<b>Wall mounting</b>
Salt mist:	<b>Resistant</b>
UV radiation:	<b>Resistant</b>

### > EQUIPMENTS

1 terminal strip 3x10mm<sup>2</sup>  
1 current transformer  
1 modular contactor 2P 25A 24Vdc  
1 DC Leakage detector  
1 fuse holder 1P+N gG 4A  
1 power supply 24Vdc 36W  
1 control card  
1 RBG led stripes  
1 stop charge push-button (mode free)  
1 cable holder in technopolymer  
1 cable 3G2,5+1x0,5mm<sup>2</sup> 4m

excluded:

upstream protections (by the installer):  
1 circuit breaker 1P+N D20 30mA ist. A  
1 shunt trip release 24Vdc